



DURAMATT MEDIUM DUTY ACCESS MATS

Designed for short and long term access, whilst also providing effective Ground Protection and reducing on-site, property and heritage damages.

Our DuraMatt Medium Duty Access Mats have been designed with a unique diamond non-slip traction surface on top and a smooth surface on the bottom for working on hard standing areas and sensitive grass.

- max 15 tonnes
- 34/17Kg
-
-



A variety of Steel Fabricated Stillages are available

Specifications

Size: 2.45m [L] x 1.23m [W] x 12mm [D]
Half size: 2.4m [L] x 0.6m [W] x 12mm [D]
Other sizes and colours available (subject to minimum order quantities)

Weight: 34Kg / 17Kg

Load: Suggested 10-15 tonnes, weight tested up to 20 tonnes (depending on ground conditions)

Material: 100% Recycled Low Density Polyethylene (LDPE) and 100% recyclable

Colour: Standard grey. Other colours available (subject to minimum order quantities)

Key Features

- ✓ Designed for use with light/medium plant and machinery but also for work personnel and the public
- ✓ Flexible nature to follow the contours of the ground to deliver highly effective access over undulating or sloping terrain
- ✓ 4 strategically positioned connection holes and 4 hand holes / 2 hand holes for the half size
- ✓ Low transportation and handling costs
- ✓ Avoids health and safety issues
- ✓ Avoids bogged down vehicles, saving valuable time and money

Budget Options

Perhaps you don't have the budget to purchase outright, we always have a variety of solutions for you.

- **Used/second hand**
- **Buyback**
- **Lease or Finance**

Top Tip

DuraMatt Medium Duty Access Mats are a better alternative to old and inadequate materials such as plyboard, as a beneficial and long lasting solution, rather than materials that crack, splinter or break and would be disposed of at the end of a project.

As an alternative option, please take a look at our [DuraMatt Lite Ground Protection Boards](#), [Safe Site Matting](#) or [EuroTrak HD Access Mats](#).

Contact Us

elite-gss.com

sales@elite-gss.com



Civil Engineering /Infrastructure





Construction Sites



Pedestrian Walkways



Concerts and Events

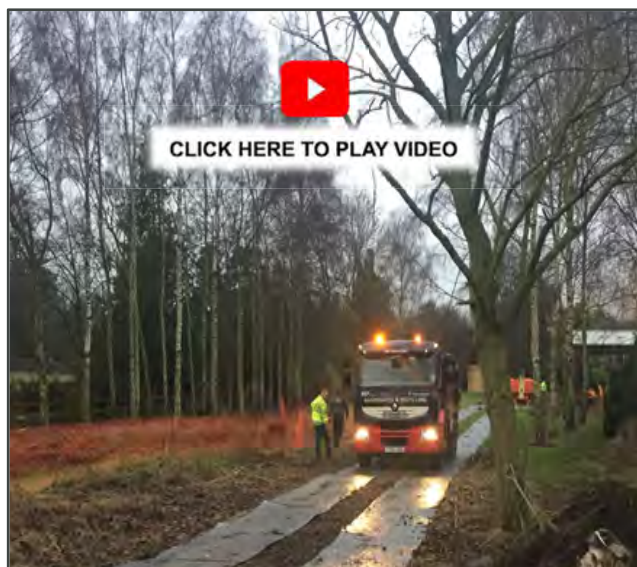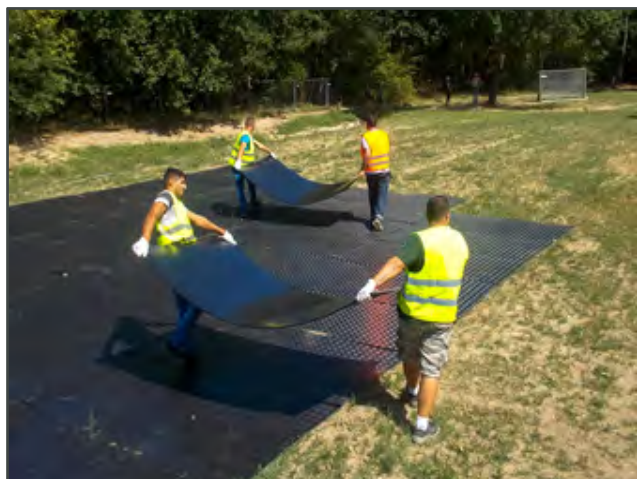

Connect, click and repeat

Installation is easy as there is no specific requirement for multiple people to lay the mats. Simply place each mat and secure with a choice of connector.

2-way & 4-way Connectors



Steel Fast Fit Connectors



Installation timings

Standard 2-way or 4-way Connectors can be tightened using standard bolts and oversized washers. Steel Fast Fit Connectors can be secured using a mallet. A spanner, wrench, or battery operated drill is recommended, do not over tighten.



2 people required. No need for specialist lifting equipment



Single line connection in 2 mins



Grid connection in less than 5 mins



240m² area in approx. 2 hours (depending on ground conditions and site layout)



When driving on the mats, do not exceed 5mph

Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs



Eco-friendly and long lasting

Made from 100% Recycled Low Density Polyethylene (LDPE) which is also 100% recyclable.

Additional information

 **Technical and Installation Guide**

 **Elite Products Brochure**

We advise not to use Steel Tracked vehicles with any composite mats unless pre-authorized and agreed beforehand. Traversing and aggressive movement on the mats may cause damage to them and the connectors, and this will be the sole responsibility of the customer and user of the mats.