

## CABLE RAMP

An effective cable protection solution to allow free and easy movement of both pedestrians and heavy plant and machinery on site.

### Specifications

**Size:** 3 Channel: 990mm [L] x 300mm [W] x 45mm [D]  
5 Channel: 890mm [L] x 590mm [W] x 75mm [D]  
Internal channel : 30mm [H] x 35mm [W]  
50mm [H] x 35mm [W]

**Weight:** 8.5Kg / 19Kg

**Load:** 3 Channel: 6 tonnes axle weight  
5 Channel: 12 tonne axle weight

**Material:** High quality black rubber base with PVC hi-visibility yellow lid

**Features:**

- 4 individual securing points – if you need to secure to a hard standing area
- Simple male/female connection design
- Quick and cost-effective
- Flip lid for easy access to cables
- Non-slip traction surface
- Non-conductive
- UV protected against sunlight/other weather conditions
- Easy clean/wipe

**Preventative:** Stops dangerous trips and falls over cables and reduces the risk of electrocution

**Preparation:** Minimal – Designed to be easily installed, use on a clean, flat and stable surface

**Storage:** Can be palletised



### Delivery

We hold most stock, so whether you require same/next day or standard delivery, here are the options to receive products.



**Same day\***



**Next day\***




**Standard 3 days**

Typical enquiries handled within 1 hour from receiving your call.

\* Depending on stock availability when placing order

■ Rigid tension ■ Safety ■ Connection

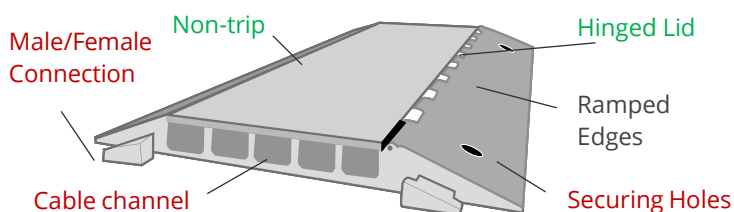

☐ Sports Grounds

☐ Utility Projects

☐ Construction

☐ Outdoor Events



6/12 tonnes-  
axle weight



8.5/19Kg



### Purpose

- ✓ Keep cabling safe from vehicles and pedestrians
- ✓ Reduced trip hazards and maximised safety around site
- ✓ Can be used for traffic calming

### Additional Products

As an alternative option, please contact us about our Speed Ramps.

### Contact Us

 elite-gss.com

 sales@elite-gss.com

# Installation Guide

## Step 1 – Preparation

Before installation, please inspect the area for any obstructions. Installation must be carried out on a flat and stable surface, avoid inclines and broken ground as damage could occur.

## Step 2- Assembly

Decide on how many Cable Ramps you're going to be using, these will later need to be aligned with the female connectors over the male connectors.

## Step 3 – Installation and connection

Next, secure the Cable Ramp to the ground through the 4 individual securing points and drill into the ground.

Once secured into the ground, connect them together via the male/female connection points.

When connection you must press down the join where the Cable Ramps meet in order to secure the connection.

Once more Cable Ramps have been added, slot into the other and repeat the drilling process.

Open hi-visibility yellow lid and install your cables along the channels. When adding your cabling to the system, please ensure that everything is contained, and nothing is caught. Once done, close the lid.

\*The installation must be inspected occasionally to ensure that no damage has occurred.



## Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs



## Installation timings



1 person required



Connection in a matter of minutes

Linear m



100 linear metres in 2.5 hours



Site speed limit must be adhered to

## Events and Festivals

Cable Ramps are particularly ideal for events and festivals in reducing the trip hazard where cabling is prominent. They're also used extensively around construction sites around modular buildings and generators. These Cable Ramps are 100% composite and non-conductive to provide safety of the covered wires.

## Cable Ramp

Allow for added security and safety of wires and cables whilst also allowing the free movement of both pedestrians and heavy machinery and vehicles on site.



## Additional Information

Our 3 and 5 Channel Cable Ramps do not require specialist lifting equipment or multiple people to install the system.

The Cable Ramps have an added hi-visibility yellow lid to ensure safe use in low light conditions.

## Handling and Storage

Cable Ramps are delivered to site and will most likely be palletised as followed:

- 3 Channel – 112 per pallet
- 5 Channel – 56 per pallet

These pallets are also banded with polyester strips. Pallets are incorporated into the packaging to aid the use of mechanical handling with apparatus such as fork-lifts and lifting booms with slings.

The Cable Ramps should be fully closed and secured during transport or being moved into position. Please store in original packaging on a flat, solid and free draining storage area until ready for use. Packs should not be unravelled, unless safely positioned at ground level.

Gloves should be worn when handling the Cable Ramps.

## Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs



No tape or rope must be used within installation and during use. Avoid concentrated loads, load capacity can decrease with high temperatures. Always test before use.

Never mix fluid and power cables, keep these in separate channels. Ensure that the system is not exposed to long-term contamination such as battery acid, antifreeze or break fluid.

For maintenance of the product, inspect regularly for damage and replace where necessary. Remove any debris by using a detergent and water solution.

**When driving over the Cable Ramps, do not exceed speeds of 5mph.**

## Additional information



**Product Guide**



**Elite Products Brochure**