



ANTI-CLIMB MESH FENCE PANEL

The safe and cost effective way to temporarily fence off a site, directing the public away from unsafe and hazardous areas.

Specifications

Size:	2.0m [L] x 3.5m [W] x 2.1mm [D]
Weight:	17Kg
Material:	Galvanised Steel to BS EN 10204-2 Standard
Features:	<ul style="list-style-type: none"> o Quick to assemble and connect o Used in conjunction with hi-vis rubber feet o Round top to reduce weak spots o Can be used for business advertising o Compact for transport and storage
Preventative:	Keeps trespassers at bay and prevents vandalism to an open site
Preparation:	Minimal – stand onto flat ground and use couplers to secure panels together
Ecosystem:	Secures and avoids damage to property, heritage and environment
Storage:	Compact, stack on top of each other or contain in stillage (ask for our options)
Accessories:	Standard/anti-tamper fence couplers and hi-visibility/standard rubber block fence feet are required

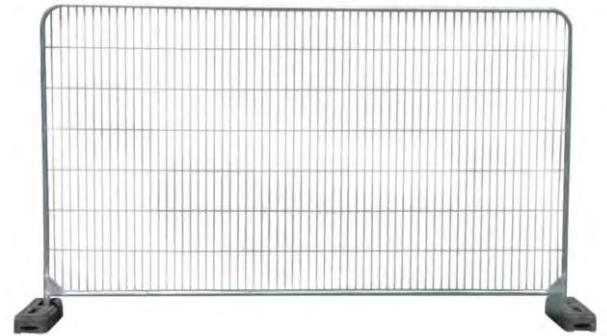

A variety of Steel Fabricated Stillages are available

Delivery

We hold most stock, so whether you require same/next day or standard delivery, here are the options to receive products.



Same day*




Next day*



Standard 3 days

Typical enquiries handled within 1 hour from receiving your call.

* Depending on stock availability when placing order

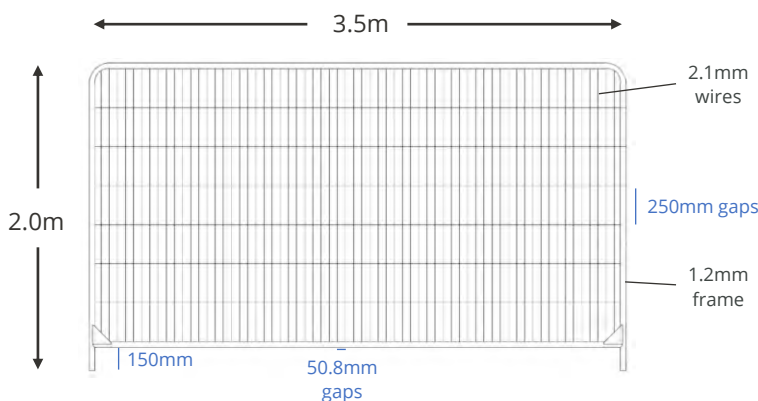

- Construction
- Civil Engineering
- Groundworkers
- Outdoor Events



17Kg



Protect people



BS EN 10204:2

Purpose

- ✓ Effective security perimeter
- ✓ Restrict access for safety
- ✓ Direct public away from unsafe areas
- ✓ Lightweight and portable for re-use

Additional Products

As an alternative option, please take a look at our [Fixed Leg Crowd Control Barrier](#), [Elite SlotBlock Barrier](#) or [Bison Barrier](#).

Contact Us

 elite-gss.com

 sales@elite-gss.com

Installation Guide

Step 1 - Preparation

Before installation, please ensure that there are no obstructions, and that the barrier will be placed on a reasonably level and even surface for optimal performance.

Please consider the environmental/working conditions that this will be exposed to and that suitable stabilisation is used.



Step 2 - How to attach the feet

First, place the rubber fence feet down and with one person at each side, pick up the barrier with two-hands and push the fence panel down into the top of each foot and secure into place.


Couplers and tools are required for assembly.



Step 3 - Connecting

When you get to your desired area, place the barrier onto the ground, being careful to keep the barrier clear of obstructions and away from your feet.

The barriers are quick and easy to erect and dismantle by using fence couplers to fix them together.

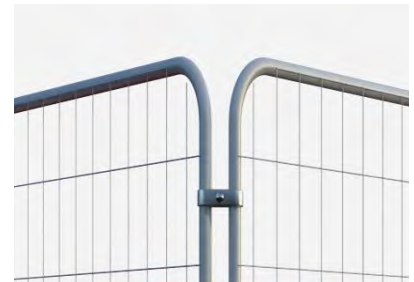

Step 4 - Attachments (optional)

The Anti-climb Mesh Fence Panels can be used in conjunction with the Elite SlotBlock Barrier and standard or anti-tamper fence couplers.



Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs



Installation timings



2 people required to lift. Spanner required for the couplers*



Single connection in less than 5 mins



100 linear metres in approx. 2.5 hours (depending on ground conditions and site layout)



A variety of Steel Fabricated Stillages are available to stack Mesh Fence Panels

Anti-Climb Mesh Fence Panel

For site safety and a cost effective way to temporarily fence off a perimeter, the 3.5m round top Anti-Climb Mesh Fence Panels are a perfect choice.

Additional Information

With the unique design where the anti-climb mesh is slotted inside the tube, the wire remains firmly lodged inside the frame, even if welds are broken.

When working in high winds, extra stability can be offered when attaching the panels to the Elite SlotBlock water filled barriers.

This product can be powder coated to suit corporate identity (minimum order quantity required)

These panels are durable for temporary fencing and will exhibit the following benefits:

- Long life expectancy
- Resistant to impact
- Easily assembled
- Maintenance free
- Non-toxic
- Effectively stack and store

Handling and Storage

Anti-Climb Mesh Fence Panels are delivered to site banded with polyester strips. Pallets are incorporated into the packaging to aid the use of mechanical handling with apparatus such as fork-lifts and lifting booms with slings.

These mats should be stored in original packaging on a flat, solid and free draining storage area and we recommend the banding should not be removed when storing them, unless when safely positioned at ground level or until ready for use.

Gloves should be worn when handling.



Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs



Budget Options

Perhaps you don't have the budget to purchase outright, we always have a variety of solutions for you.

- Hire for short or long term
- Buyback
- Used/second hand
- Lease or Finance

It is the users responsibility to carry out a full site survey prior to installation. Elite GSS Ltd accepts no liability whatsoever from any damage, loss or injury arising from the installation and ground conditions on which these products are used.

Additional information

PDF Product Guide

PDF Elite Products Brochure