





ECOTRAX® HEAVY DUTY ACCESS MAT

Designed with traction in adverse weather conditions for temporary roadways, walkways and overflow car parks.

The EcoTrax Heavy Duty Access Mats “non-slip” traction surface substantially improves vehicle grip and forward motion whilst reducing sideways slippage.

These mats are durable, hold a long lifespan and are suitable for both short and long-term projects.

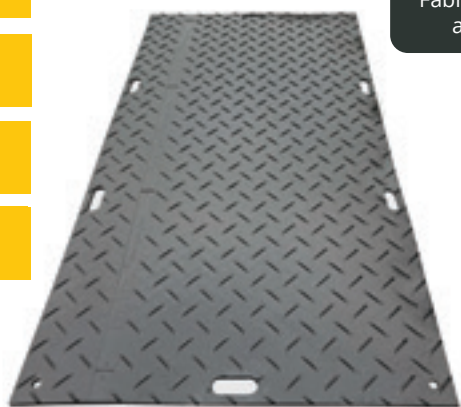

A variety of Steel Fabricated Stillages are available



Specifications

Size: 2.4m [L] x 1.2m [W] x 12mm [D]

Weight: 36Kg

Load: Suggested 50 tonnes (depending on ground conditions)

Material: 100% Recycled High Density Polyethylene (HDPE) and 100% recyclable

Surface: Top: Non-slip surface
Bottom: Diamond pattern surface

Key Features

- ✓ Double-sided, non-slip traction surface for optimal grip in all weather conditions
- ✓ Multiple connection points
- ✓ 6 hand holes for easy handling and installation
- ✓ Avoids environmental damage
- ✓ Reduces vehicle bogging
- ✓ Low cost transportation and handling
- ✓ Various connection options

Budget Options

Perhaps you don't have the budget to purchase outright, we always have a variety of solutions for you.

- Hire for short or long term
- Used/second hand
- Buyback
- Lease or Finance

Top Tip

These mats are designed to be man-handable, although technically heavy duty in nature and provide a functional heavy duty access solution.

As an alternative option, please take a look at our [Heavy Duty Roadway Panels](#), [Steel Road Plates](#) or [EuroTrak HD Access Mats](#).

Contact Us

 elite-gss.com

 sales@elite-gss.com



Civil Engineering /Infrastructure



Construction Sites



Festival and Outdoor Events



Temporary Access and Ground Protection



How are they connected?

We have provided multiple connecting points for use with 2-way or 4-way connectors.

Place two mats in a line, either forward or sideways, for fast single joining with the 2-way connector.

Alternatively, create wider coupling with the 4-way connectors to fill large areas.

2-way & 4-way Connectors



Steel Fast Fit Connectors



Installation timings

There are 6 strategically positioned hand holes which makes the lightweight mat quick and easy to install.

A spanner, wrench or battery operated drill is recommended, do not over tighten.



2 people required. Hand holes at each side to aid manual handling



Single line connection in 3-5 mins



Grid connection in less than 7-10 mins



250m² area in approx. 3 hours (depending on ground conditions and site layout)



When driving on the mats, do not exceed 5mph



Eco-friendly and long lasting

Made from 100% Recycled High Density Polyethylene (HDPE) which is 100% recyclable.

Additional information



Technical and Installation Guide – coming soon



Elite Products Brochure

We advise not to use Steel Tracked vehicles with any composite mats unless pre-authorized and agreed beforehand, traversing and aggressive movement on the mats may cause damage to them and the connectors and this will be the sole responsibility of the customer and user of the mats.

Need to Natter?

0800 622 6838

elite-gss.com

News, insights and events

Product reviews and offers, answered questions and discussion tips

Shared business and industry information

'How to' use our products, installations and vlogs

